




LCC-2LED Series

Steel LED Combination Sign



Arrow (Chevron) Designation

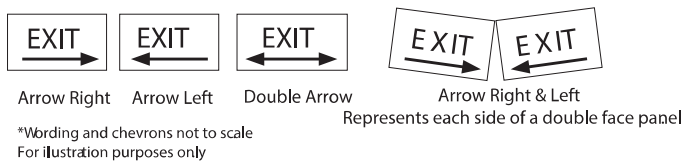

Features


- White LED light source
- Each unit comes with two adjustable 6V-5W LED heads
- Constructed of 20-gauge steel with an off-white finish and glass panels
- Canopy supplied for top or end-mount
- Universal Knockout pattern on back plate for wall mount
- Single or Double face
- Each unit comes with two adjustable 6V-5W LED lamp heads
- Each unit provides 280 lumens
- 6V Sealed Lead-Calcium, maintenance-free rechargeable battery
- Optional 10W remote capacity available on the LCC-2LED-RC model
- Low voltage disconnect
- Dual voltage 120/277, 60Hz
- LED indicator light and push-to-test switch
- 120 minute run time in Emergency mode
- UL listed for Damp Location 68°F to 122°F (20°C to 50°C)
- Meets UL 924, NFPA 101 Life Safety Code, NEC, OSHA, local and state codes
- Meets City of Chicago requirement
- 3 Year Full warranty

Power Consumption Chart

Series	AC input		DC Specs	
LCC-2LED	120VAC, 60HZ, 0.12A	12W	Lead-Calcium	Minimum 120 minutes
LCC-2LED	277VAC, 60HZ, 0.06A	13W		
LCC-2LED-RC	120VAC, 60HZ, 0.12A	12W		
LCC-2LED-RC	277VAC, 60HZ, 0.06A	13W		



Dimensions

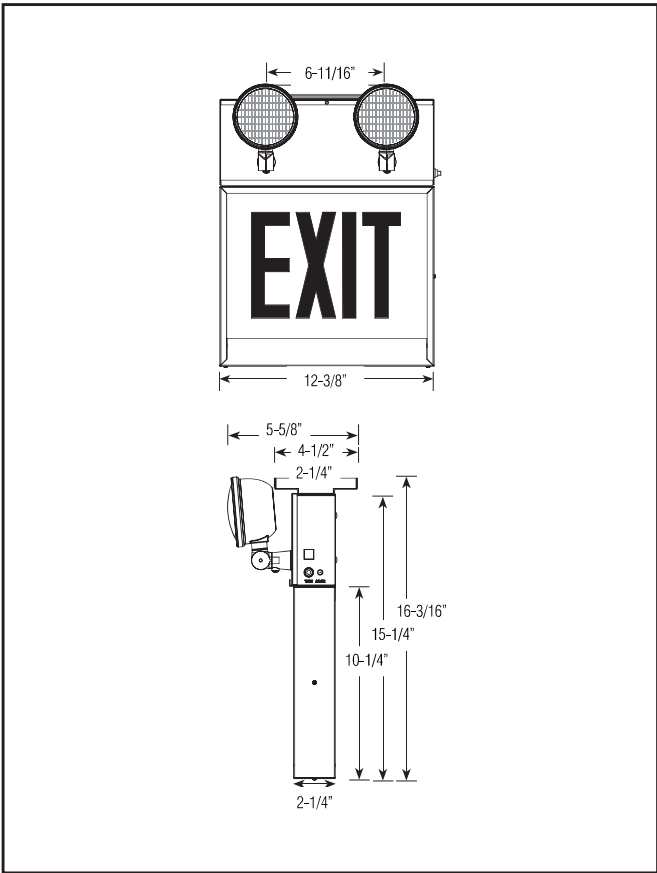

How To Order

Example: LCC-2LED-R#2A

Series	Heads	Legend Style	Options
LCC	-2LED= 2 Steel Round LED	-R#2A = Single Face, STAIRS, No Arrow	Blank= No Option
		-R#17A = Double Face, STAIRS, No Arrow	
		-R#3 = Single Face, EXIT, No Arrow	
		-R#18 = Double Face, EXIT, No Arrow	
		-R#5A = Single Face, STAIRS , Arrow right	
		-R#6 = Single Face, EXIT , Arrow right	
		-R#8A = Single Face, STAIRS, Arrow left	
		-R#9 = Single Face, EXIT, Arrow left	
		-R#11A = Single Face, STAIRS , Double Arrow	-RC= 6V-10W Remote Capacity*
		-R#23A = Double Face, STAIRS , Double Arrow	
		-R#12 = Single Face, EXIT , Double Arrow	
		-R#24 = Double Face, EXIT , Double Arrow	
		-R#20A = Double Face, STAIRS , STAIRS, Arrow right/left	
		-R#21 = Double Face, EXIT , EXIT, Arrow right/left	